

---

# RLY-108 8-Channel TTL Relay Board

---

## Operating Instructions

**Auric**  
SOLUTIONS™

**Auric Solutions Limited**  
4 Maple Close, Emsworth  
Hampshire PO10 7RJ, UK  
Tel. +44 (0) 1243 389712  
info@auricsolutions.com  
[www.auricsolutions.com](http://www.auricsolutions.com)


# Contents

<b>Features .....</b>	<b>3</b>
<b>Connections.....</b>	<b>4</b>
Power Supply .....	4
Control Signals .....	4
SPDT Relays.....	4
<b>Safety Guidelines .....</b>	<b>5</b>
<b>Specifications.....</b>	<b>5</b>
Electrical .....	5
Mechanical .....	5
Environmental .....	6
<b>Safety .....</b>	<b>6</b>
<b>Electromagnetic Compatibility .....</b>	<b>6</b>
<b>CE Compliance .....</b>	<b>6</b>
<b>Support .....</b>	<b>6</b>

Product and company names used in this document are trademarks of their respective companies.

# Features

- The RLY-108 provides 8 independently-controlled SPDT relays.
- Control signals for switching the relays use +5V logic levels and are TTL compatible.
- The RLY-108 requires an external DC power supply with a voltage range of 7 to 32 VDC.
- LEDs are provided for clear indication of power and relay operation.
- All field wiring connections are by means of screw terminals for stranded wires up to maximum size of 1 mm<sup>2</sup>.
- The RLY-108 may be mounted directly to a panel using appropriate length insulating standoffs.
- Alternatively, the RLY-108 may be mounted on a panel or DIN rail using the optional universal mounting base.

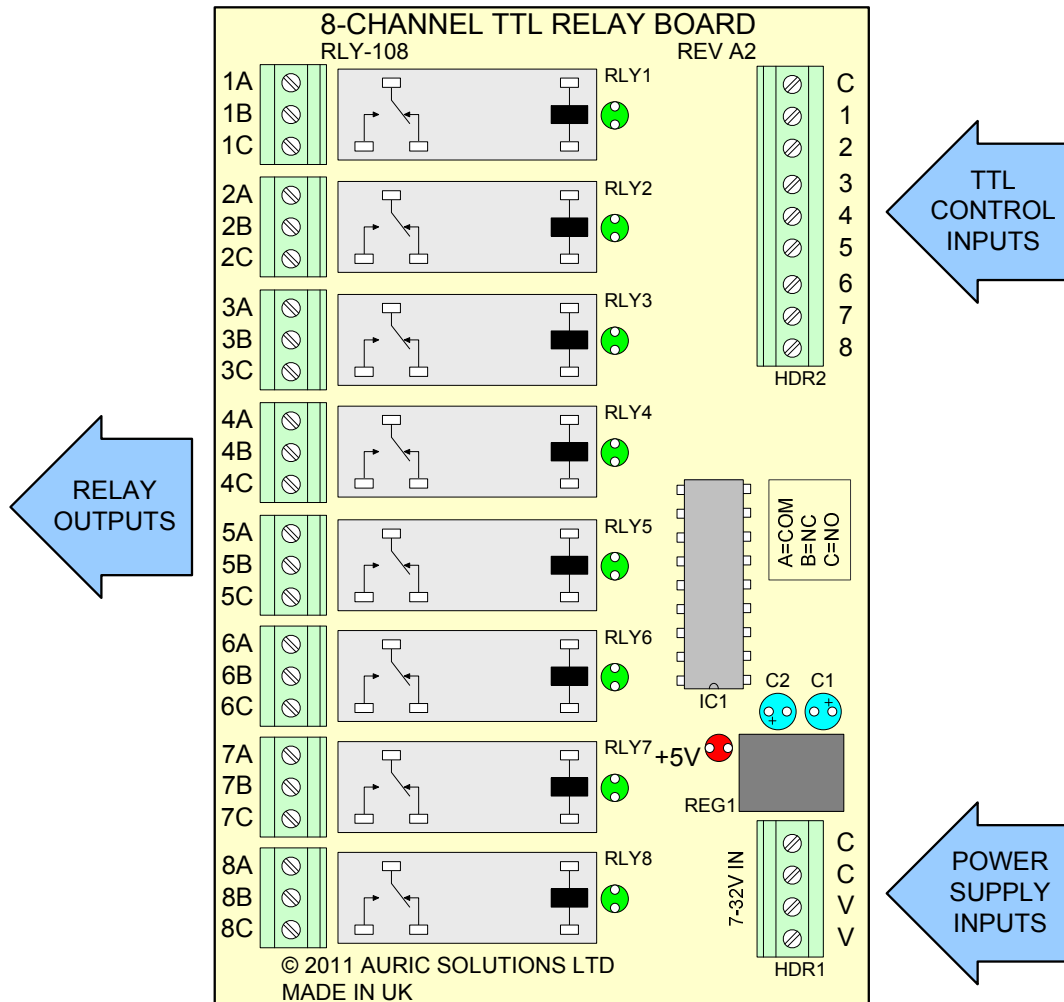

Component layout on the RLY-108 relay board.

# Connections

## Power Supply


- The external DC power supply *must* be connected to HDR1.
- The positive supply input connects to either of the V terminals.
- The 0V supply input connects to either of the C terminals.
- The spare V and C terminals are intended to loop the power to/from other equipment.

## Control Signals

- Control signal inputs *must* be connected to HDR2.
- The C terminal is the signal common, or logic 0V reference.
- Each of the other terminals number 1 to 8 provides the input for a TTL signal corresponding to the equivalently numbered relay.
- A TTL logic high (or +5V) on an input will energise the corresponding relay coil.

## SPDT Relays

- Each SPDT relay has its own 3-terminal connector.
- The A terminal is the COMMON.
- The B terminal is the NORMALLY CLOSED (NC).
- The C terminal is the NORMALLY OPEN (NO).
- The relay's LED will illuminate when the relay is energised.

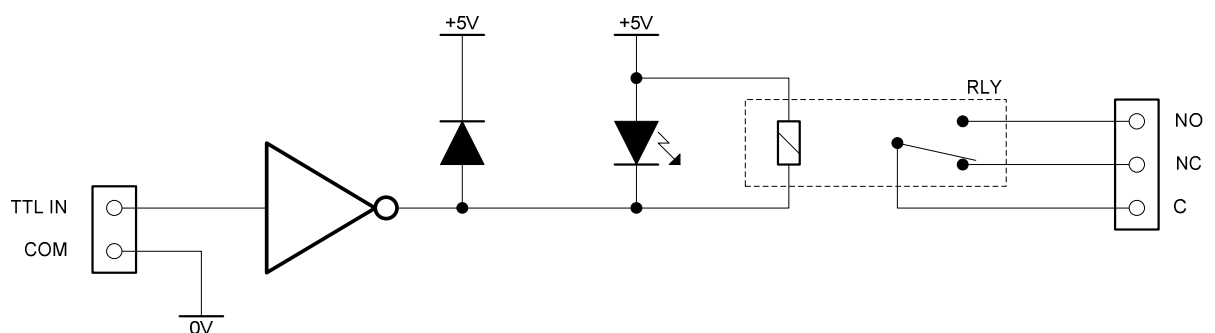

*Electrical diagram for a single relay channel.*

## Safety Guidelines

- The RLY-108 has a galvanic isolation barrier between relay contacts and the control circuitry to protect the control system and power supply from potentially hazardous voltages.
- The RLY-108 is intended for indoor use only and *must* be mounted inside a suitable UL-rated enclosure.
- Make sure that all field wiring and connections meet applicable electrical codes of practice for safety and ease of identification.
- Mount the RLY-108 in an area and position that prevents accidental or unauthorised access to wiring that carries hazardous voltages.

## Specifications

### Electrical

- Number of channels ..... 8
- Input signal type ..... +5V/TTL
- Relay type ..... SPDT (SPCO)
- Relay contact material ..... AgNi + gold plating
- Relay maximum switching voltage ..... 250 VAC; 30 VDC
- Relay maximum switching current ..... AC 8 A; DC 5 A
- Relay life expectancy (at full AC load) ..... 100,000
- Relay operate time ..... 15 ms max.
- Supply voltage ..... 7 to 32 V DC
- Supply power requirement ..... 2.1 W max.
- Supply current at 7V ..... 280 mA
- Supply current at 30V ..... 70 mA

### Mechanical

- Weight ..... 122 g
- Weight (with universal mounting) ..... 186 g
- PCB dimensions ..... 110 x 72 mm
- Overall dimensions (with universal mounting) ..... 139 (L) x 77 (W) x 44 (H)
- Relay life expectancy (operations) ..... 10,000,000 min.

## **Environmental**

- Storage temperature..... -40 to 85 °C
- Operating temperature..... -40 to 70 °C
- Humidity ..... 85% RH max.

## **Safety**

This product is designed to meet the requirements of the following standards of safety of electrical equipment for measurement, control, and laboratory use:

- EN601010-1:2001 Safety requirements for electrical equipment for measurement, control, and laboratory use — Part 1: General requirements

## **Electromagnetic Compatibility**

This product is designed to meet the requirements of the following standards of EMC of electrical equipment for measurement, control, and laboratory use:

- EN61326-1:2006 Electrical equipment for measurement, control and laboratory use — EMC requirements Part 1: General requirements

## **CE Compliance**

This product meets the essential requirements of applicable European Directives, as amended for CE marking, as follows:

- The Low Voltage Directive 2006/95/EC
- The EMC Directive 2004/108/EC

## **Support**

For technical support, contact Auric Solutions Ltd using one of the following methods:

- Web ..... [www.auricsolutions.com](http://www.auricsolutions.com)
- Email ..... [support@auricsolutions.com](mailto:support@auricsolutions.com)
- Telephone (UK) ..... +44 1243 389712